

UDC 669.056.9:621.793.6]:536-047.44

DOI <https://doi.org/10.26661/2071-3789-2020-1-06>

Sereda Borys, head of the department, doctor of technical sciences, Dniprovsk state technical university. Kamianske. ORCID: 0000-0002-9518-381X

Khina Borys, chief researcher, doctor of physical and mathematical sciences, physico-technical institute, NAS of Belarus republic. Minsk. ORCID: 0000-0002-5179-0941

Kruglyak Irina, associate professor, candidate of technical sciences, Dniprovsk state technical university. Kamianske. ORCID: 0000-0001-8872-6778

THERMODYNAMIC ANALYSIS OF THE GAS MEDIUM IN THE FORMATION OF DIFFUSION COATINGS USING COMPOSITE SATURATING CHARGES

Review of the main processes of formation of diffuse coatings doped with molybdenum, vanadium and tungsten. The basic features of the formation of diffusion layers during chemical-thermal treatment are considered.: When the SHS is tested, the container is heated to temperatures of 1173-1330 K. Within 1-2 hours, a diffusion coating is formed due to the saturation of the surface of structural materials with atoms of saturating elements - Cr, Al, V, Ti, B, W, Mo. As saturating elements, the defects of these elements and the chemical compounds of these elements were used, and to determine the possibility of using specific substances, chemical reactions were considered that can occur in the temperature range of diffusion saturation using SOS. It should be noted that the metallothermal Reduced oxide, which is used in the synthesis of powder media for CHT, is very fast. When obtaining diffuse layers using the composition of saturating the medium, a gas phase is formed, containing spolo-I, I₂, I₃, H, H₂, H₃, Cl₂, Cl₃ with chemical elements. With an increase in temperature, an increase in the amount of halides is observed. This confirms the possibility of transferring alloying elements for the formation of diffusion coatings. Also, the amount of products in the gaseous phase increases and condensed products are released. It is characteristic that in the temperature range of 700-1500 K, the decomposition of reaction products occurs during CHT, which is confirmed by the production of decomposition substances and a sharp increase in the number of gas moles.

Key words: diffusion, composite saturating media, thermo-dynamics, coatings, phase

Chemical heat treatment (CHT) of metals and alloys, consisting in saturation with various elements (metals or non-metals) from the external environment in order to change the chemical and phase composition, structure and properties of the surface layers of the product, is a high-temperature process that has a complex multistage nature [1]. It is based on such complex physicochemical phenomena as heterogeneous chemical reactions and phase transformations, heat transfer, micro- and macroscopic mass transfer, which occur in solid, liquid and gaseous media (both in a saturating medium and in a growing solid coating).

The formation of a diffusion layer during CHT has the following characteristic features:

- 1) the final product formed on the surface of the saturable product (solid solution with an increased content of the saturating element or refractory compounds - carbides, nitrides, intermetalides, silicides etc.) is in a solid state in a wide range of process temperatures;
- 2) the initial or intermediate substances can be in a solid, liquid and gaseous state and undergo phase transitions;
- 3) heat and mass transfer in different phases have a significant effect on the kinetics and mechanism of heterogeneous reactions;
- 4) joint heat and mass transfer and heterogeneous reactions directly affect the structure and composition of the resulting product and, ultimately, the properties of the surface layers of the product;
- 5) these phenomena are manifested in different ways in various specific systems and technological processes of CHT.

Classification of CHT processes according to saturation methods, the nature of the saturating element, etc. is given in the literature [2-5]. According to the modes of implementation, various methods of chemotherapy can be conditionally divided into two groups:

a) traditional slow-flowing (furnace) processes;

b) intensive (fast-flowing) processes based on the use of fast heating, for example, high-frequency currents (HFC) or SHS processes, which, along with fast heat release and high temperature, are characterized by a short completion time of chemical reactions and phase transformations in a saturating mixture.

For the processes of metallothermal processes [6,7] an important characteristic is the adiabatic combustion temperature T_{ad} and the equilibrium composition of the reacting system at T_{ad} . Usually thermodynamic calculation of the quantity T_{ad} is based on a simple assumption [8]: the reaction proceeds completely (with a conversion of 100%) under adiabatic conditions; heat of reaction at initial temperature T_0 ($T_0 \geq 298$ K) spent on warming up to T_{ad} and possible melting of products. The quantity T_{ad} is determined from the enthalpy balance condition $\Delta H_{T_0}(r) = \Delta H_{T_{ad}}(pr)$:

$$\begin{aligned} \Delta H_{T_0}(r) &= \sum_r \left[\Delta H_{298}^0(r) + \int_{298}^{T_0} c_p(r) dT \right] = \Delta H_{T_{ad}}(pr) = \\ &= \sum_{pr} [\Delta H_{298}^0(pr) + (1-x_m) \int_{298}^{T_{ad}} c_p(pr_s) dT + \\ &+ x_m (\int_{298}^{T_m} c_p(pr_m) dT + \Delta H_m(pr_m) + \int_{T_m}^{T_{ad}} c_p(pr_m) dT)], \end{aligned} \quad (1)$$

where ΔH_{298}^0 – the standard enthalpy of formation of a substance; ΔH_m and T_m – heat and melting temperature; c_p – heat capacity; x_m – molar fraction of the melt in the reaction products; r means reagents, and pr – reaction products; subscripts s and m refer to solids (solid) and melt (melt), respectively.

Formula (1) was used to calculate the value of T_{ad} in a large number of metallothermal systems in the course of one reaction [8–10].

When vanadium using a composite saturating medium, a gas phase is formed, which contains compounds H , H_2 , OH , Cl , Cl_2 , Cl_3 , Cl_6 , $2Cl$ with chemical elements (Fig. 1).

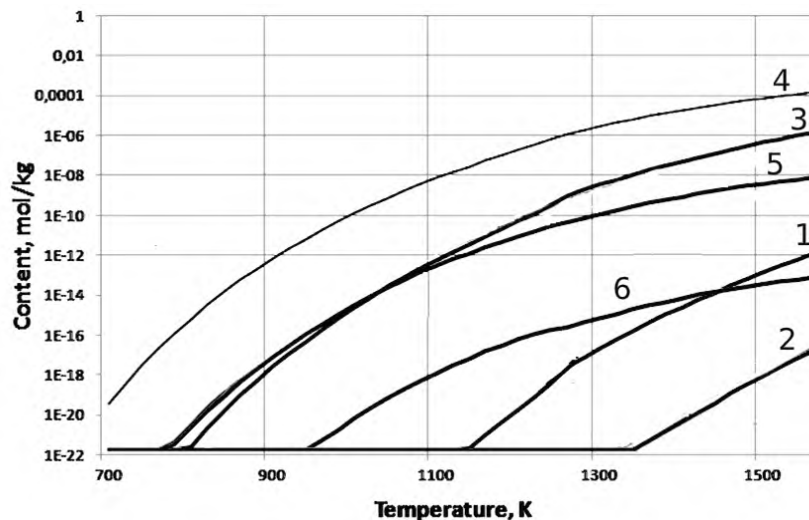


Figure 1 – The content of the gaseous vanadium compound in a container with a composite saturating medium for the system: 18% EC + 22% V + 55% Al_2O_3 + 3% NH_4Cl + 2% NH_4I :

1 - V, 2 - VO, 3 - VCl, 4 - VCl₂, 5 - VCl₃, 6 - VCl₄

Gaseous products interacting with elements of the powder system (V, Cr) go into the gas phase (appear AlH , AlH_2 , $AlOH$, $AlCl_2$, $AlCl_3$, Al_2Cl_6 , $AlHCl$, AlH_2Cl , $AlOHCl_2$, CrO , CrH , $CrOH$, $CrCl$, $CrCl_2$, $CrCl_3$, $CrOCl$, $CrOCl_2$, VO , VCl , VCl_2 , VCl_3 , VCl_4).

When molybdenum is used with a composite saturating medium, a gas phase is formed that contains compounds H , H_2 , H_3 , Cl , Cl_2 , Cl_3 , Cl_6 , I , I_2 , I_3 with chemical elements (Fig. 2).

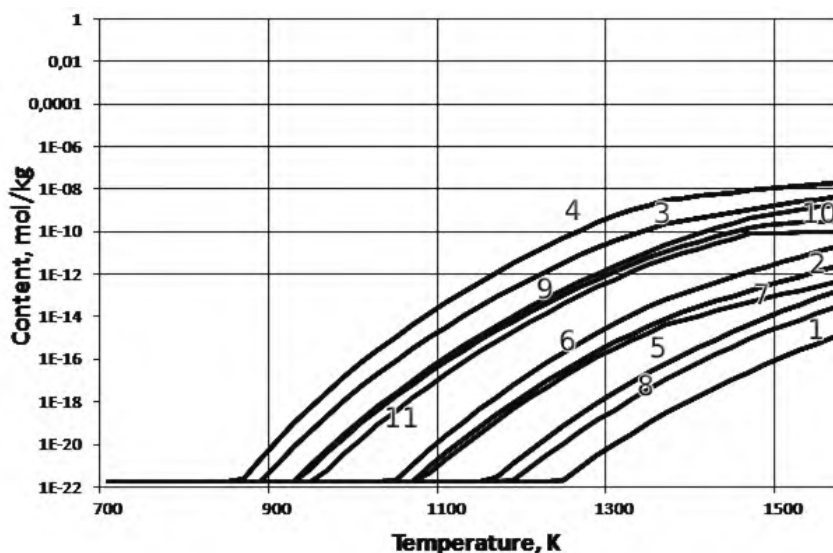


Figure 2 — Content of a gaseous molybdenum compound in a container with a composite saturating medium for the system: 16% EC + 32% $FeMo$ + 46% Al_2O_3 + 2% I_2 + 4% NH_4Cl :
 1 - $MoCl$, 2 - $MoCl_2$, 3 - $MoCl_3$, 4 - $MoCl_4$, 5 - $MoOCl$, 6 - $MoOCl_2$, 7 - $MoOCl_3$,
 8 - MoI , 9 - MoI_2 , 10 - MoI_3 , 11 - MoI_4

Gaseous products interacting with elements of the powder system (Al , Mo , Cr) and transferred to the gas phase (appear CrH , $CrOH$, $CrCl$, $CrCl_2$, $CrCl_3$, $CrOH$, $CrOCl_2$, CrI , CrI_2 , CrI_3 , $MoCl$, $MoCl_2$, $MoCl_3$, $MoCl_4$, $MoOCl$, $MoOCl_2$, MoI , MoI_2 , MoI_3 , MoI_4).


When tungstening using a composite saturating medium, a gas phase is formed that contains compounds F , F_2 , F_3 , F_4 , F_6 , I , I_2 , I_3 , I_4 with chemical elements. With increasing temperature, an increase in the amount of halides is observed (Fig. 3).

Gaseous products interacting with elements of the powder system (Al , W , Cr) and transferred to the gas phase (appear AlF , AlF_2 , AlF_3 , Al_2F_6 , $AlOF$, $AlOF_2$, AlI , AlI_2 , AlI_3 , CrF , CrF_2 , CrF_3 , CrF_4 , $CrOF$, CrO_2F , $CrOF_2$, CrO_2F_2 , CrI , CrI_2 , CrI_3 , WF_2 , WF_3 , WF_4 , WOF , WO_2F , WOF_2 , WOF_3 , WI_2 , WI_3 , WI_4).

At temperatures of 700 K, part of the condensed phase practically does not change. This fact allows us to assume that in the temperature range of 700...1600 K, a reaction occurs with the release of a condensed phase, but without a change in the number of moles, which is typical for decomposition reactions, exchange of material, that is, in fact, chemical transport of elements takes place [11]. In the temperature range of 700...1600 K there are: condensed compounds: $Al_2O_3(c)$, $AlF_3(c)$, $Cr_2O_3(c)$, $W(c)$, $WO_2(c)$, $Al_2O_3(c)$, $AlN(c)$, $Fe(c)$, $Cr(c)$, $CrCl_2(c)$, $CrI_2(c)$, $Mo(c)$, $Cr_2N(c)$, $Al(c)$, $Al_2O_3(c)$, $AlN(c)$, $V(c)$.

As a result of the thermodynamic calculation of the equilibrium composition of the reaction products, we can propose the following kinetic scheme of chemical transformations in the studied systems. The following are examples of the chemical reactions in vanadium:

1. Exothermic reaction (ER):







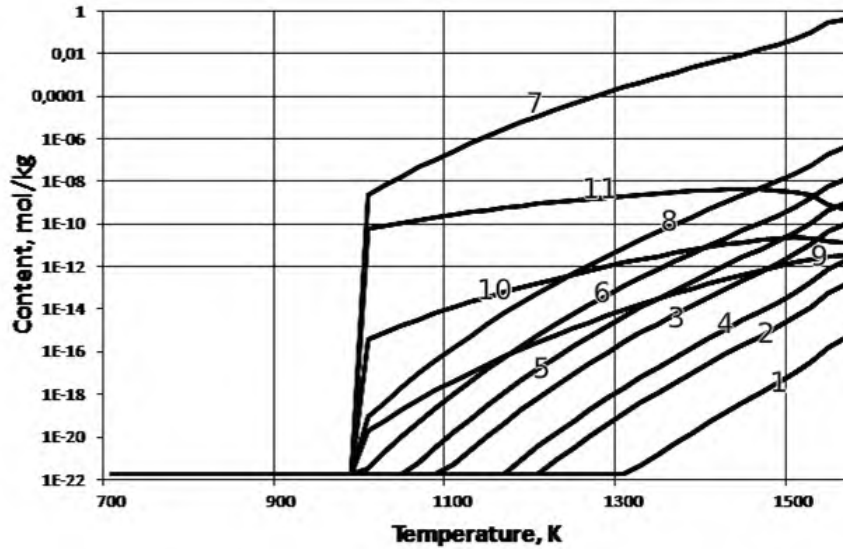



Figure 3 – The content of a gaseous tungsten compound in a container with a composite saturating medium for the system: 20% EC + 35% WO_3 + 39% Al_2O_3 + 2% I_2 + 4% AlF_3 :

2. Decay reaction of a gas transport agent:













3. Chemical transport reaction:





4. Exchange reactions with structural material:



Approbation and conclusions. Calculations are carried out and their analysis allows obtaining information about the mechanism of obtaining diffusion coatings using composite saturating media, and the use of software analysis - to perform an objective assessment of the composition of powder composite mixtures to regulate this process.

References

1. Voroshnin L.G. Multicomponent diffusion carbide coatings on iron-carbon alloys. – Minsk : BNTU, 2007. 470 p.
2. Minkevich A. N. Chemical-thermal treatment of metals and alloys. Moscow. : Mechanical Engineering, 1965. 492 p.

3. Borisenok L. A., Vasiliev L. G. Voroshnin L. G. Chemical-heat treatment of metals and alloys: Reference book. Moscow : Metallurgy, 1981. 424 p.
4. Lakhtin Yu. M., Arzamasov B. N. Chemical-thermal treatment of metals, Moscow : Metallurgy, 1985. 256 p.
5. Dubinin G. N. Diffusion chromium plating of alloys. Moscow : Metallurgy, 1964. 452 p.
6. Merzhanov A. G. Self-propagating high-temperature synthesis. Physical chemistry: modern problems. Moscow : Chemistry, 1983. P. 6-45.
7. Merzhanov A. G. Scientific foundations, achievements and prospects for the development of solid flame combustion processes *Bulletin of the Academy of Sciences. Chemical Science Series*. 1997. No. 1. P. 8-32.
8. Novikov N. P., Borovinskaya I. P., Merzhanov A. G. Thermodynamic analysis of reactions of self-propagating high-temperature synthesis. Problems of combustion in chemical technology and metallurgy. Chernogolovka: OIHF, 1975. pp. 174-188.
9. Bhaduri S. B. A thermodynamic assessment for synthesizing transition method silicides by the combustion synthesis process *Scripta Materialia*. 1992. Vol. 27. No 10. P. 1277-1281.
10. Singh M. Thermodynamic analysis for the combustion synthesis of SiC-B4C composites. *Scripta Materialia*. 1996. Vol. 34. No 6. P. 923-927.
11. Sereda B. P., Gaidaenko O. S., Sereda D. B. Thermodynamic modeling of titrated alloys doped with titanium under conditions of self-propagating high-temperature synthesis. *Mathcal modelling*. 2019. № 1 (40). Pp. 114-119.

References

1. Voroshnin L.G. Multicomponent diffusion carbide coatings on iron-carbon alloys. Minsk : BNTU, 2007. 470 p.
2. Minkevich A. N. Chemical-thermal treatment of metals and alloys. Moscow .: Mechanical Engineering, 1965. 492 p.
3. Borisenok L. A., Vasiliev L. G. Voroshnin L. G. Chemical-heat treatment of metals and alloys: Reference book. Moscow : Metallurgy, 1981. 424 p.
4. Lakhtin Yu. M., Arzamasov B. N. Chemical-thermal treatment of metals, Moscow : Metallurgy, 1985. 256 p.
5. Dubinin G. N. Diffusion chromium plating of alloys. Moscow : Metallurgy, 1964. 452 p.
6. Merzhanov A. G. Self-propagating high-temperature synthesis. Physical chemistry: modern problems. Moscow : Chemistry, 1983. pp. 6-45.
7. Merzhanov A. G. Scientific foundations, achievements and prospects for the development of solid flame combustion processes *Bulletin of the Academy of Sciences. Chemical Science Series*. 1997. no. 1. pp. 8-32.
8. Novikov N. P., Borovinskaya I. P., Merzhanov A. G. Thermodynamic analysis of reactions of self-propagating high-temperature synthesis. Problems of combustion in chemical technology and metallurgy. Chernogolovka: OIHF, 1975. pp. 174-188.
9. Bhaduri S. B. A thermodynamic assessment for synthesizing transition method silicides by the combustion synthesis process *Scripta Materialia*. 1992. vol. 27. no. 10. pp. 1277-1281.
10. Singh M. Thermodynamic analysis for the combustion synthesis of SiC-B4C composites. *Scripta Materialia*. 1996. vol. 34. no. 6. pp. 923-927.
11. Sereda B. P., Gaidaenko O. S., Sereda D. B. Thermodynamic modeling of titrated alloys doped with titanium under conditions of self-propagating high-temperature synthesis. *Mathematical modelling*. 2019. no. 1 (40). pp. 114-119.

Середа Борис Петрович, професор, доктор технічних наук, завідувач кафедри, Дніпровський державний технічний університет. Каменське.

Хіна Борис Борисович, головний науковий співробітник, доктор фізико-математичних наук, Фізико-технічний інститут НАН Білорусію Мінськ.

Кругляк Ирина Васильевна, кандидат технічних наук, доцент. Дніпровський державний технічний університет. Каменське.

THERMODYNAMIC ANALYSIS OF THE GAS MEDIUM IN THE FORMATION OF DIFFUSION COATINGS USING COMPOSITE SATURATING CHARGES

Review of the main processes of formation of diffuse coatings doped with molybdenum, vanadium and tungsten. The basic features of the formation of diffusion layers during chemical-thermal treatment are considered.: When the SHS is tested, the container is heated to temperatures of 900-1100 °C. Within 1-2 hours, a diffusion coating is formed due to the saturation of the surface of structural materials with atoms of saturating elements - Cr, Al, V, Ti, B, W, Mo,. As saturating elements, the defects of these elements and the chemical compounds of these elements were used, and to determine the possibility of using specific substances, chemical reactions were considered that can occur in the temperature range of diffusion saturation using SOS. It should be noted that the metallothermal Reduced oxide, which is used in the synthesis of powder media for CHT, is very fast. When obtaining diffuse layers using the composition of saturating the medium, a gas phase is formed, containing spolo-I, I₂, I₃, H, H₂, H₃, Cl₂, Cl₃ with chemical elements. With an increase in temperature, an increase in the amount of halides is observed.

This confirms the possibility of transferring alloying elements for the formation of diffusion coatings. Also, the amount of products in the gaseous phase increases and condensed products are released. It is characteristic that in the temperature range of 700-1500 K, the decomposition of reaction products occurs during CHT, which is confirmed by the production of decomposition substances and a sharp increase in the number of gas moles.

Стаття надійшла: 15.10.2020 р.